



MARTOS™

AARONIA

DRONE DETECTION X2


DRONE PROTOCOL DECODING AND TRACKING UP TO 40 KM



 DETECT

 LOCALIZE

 COUNTER

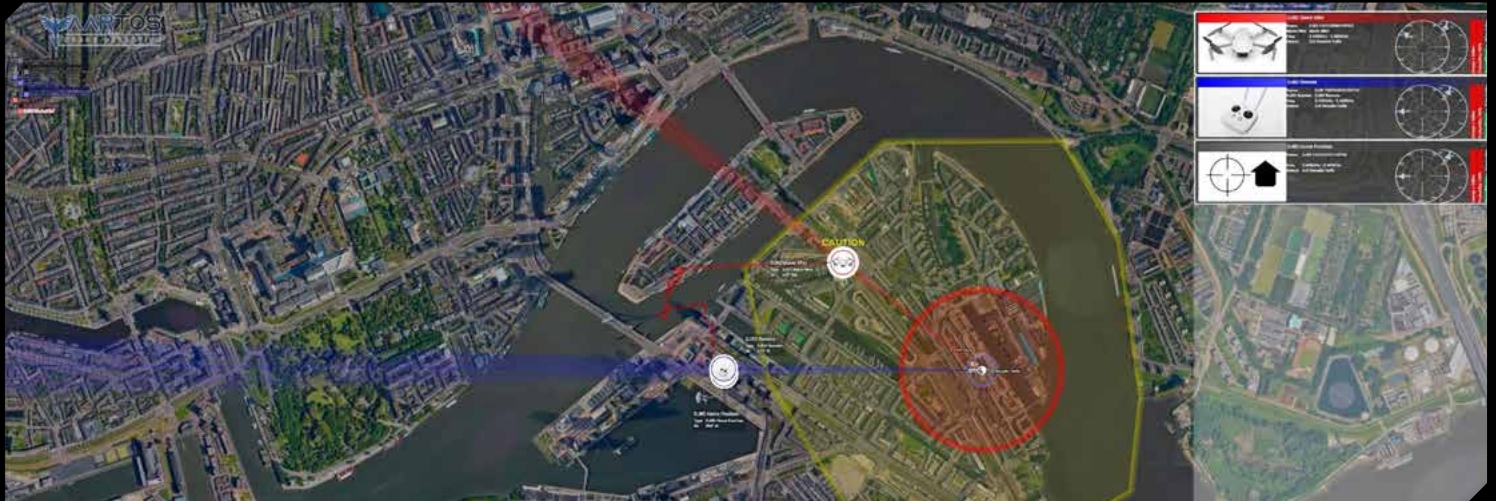

DETECT

5 km detection range, upgradable to 40 km via long range antennas

- 5 km detection range, upgradable to an astounding 40 km
- Real-time decoding of DJI OcuSync, MavLink and DJI WiFi
- Real-time 2.4 GHz and 5.8 GHz frequency coverage
- Ready to use in less than 30 seconds
- Powerful software
- Made in Germany

LOCALIZE

Shows exact locations of drone, operator and homepoint

- Shows further information like type of drone, serial number, height, speed, etc.
- Supports writing and reading custom mission data sets
- Portable and 24/7 stationary variants
- Remote control capabilities

COUNTER

Optional jamming systems with up to 10 km jamming range

- Full integration into the AARTOS™ Drone Detection System
- Seamless frequency range, selectively from 400 MHz to 6 GHz
- IP65 weather protection, operating temperature -20°C to +60°C
- Portable or stationary

X2 MIL

- MIL grade protection
- Powerful and reliable
- Hot-swap batteries

X2 Stationary

- 24/7 remote outdoor use
- Extendable with radar, jammer and cameras

X2 Portable

- Cost effective
- Highly portable
- Optional powerbank





Secure the airspace from threats

Protect your critical infrastructure from unauthorized drone access with our advanced defense system. The technology detects and neutralizes drones near your assets without disrupting normal operations. With our system, you are well prepared against potential drone attacks and can focus on the safe operation of your assets.

Powerful mobile drone detection

Introducing our portable counter drone system – especially designed for law enforcement, organizations and companies working in the field of critical infrastructure.

This system is designed to provide on-demand drone detection and optional neutralization capabilities for various scenarios such as crowd control, special operations, and perimeter security. The system is portable, easy to use and quick to deploy to any location, making it ideal for a variety of operations. It's built to withstand harsh environments and is weather resistant.

Long Range Upgrade

While all AARTOS™ X2 standard versions come with two antennas capable of a detection range up to 5 km we also offer portable and stationary long range antennas, which extend the detection range dramatically up to 40 km (FCC) in adequate line-of-sight conditions. With the use of high-gain directional antennas mounted either on a portable and extendable tripod or on a fixed mast the operator is able to reliably detect drone swarms and their operators at exceptionally high distances.



Stationary AARTOS™ X2 with long range extension



AARTOS™ X2 standard and long-range detection range



• **Safe detection – no false alarms**

Furthermore, it does not produce false alarms as the data transmitted between the drone and the operator is digitally “decoded”: mix-ups are impossible.

• **Early detection**

The AARTOS™ Drone Detection System triggers an alarm as soon as a remote control sends its first signal, even before the actual drone is airborne. Allowing countermeasures to be launched at an early stage.


• **Tracking the drone operator**

Since the AARTOS™ DDS detects both the drone (from downlink signals) and its corresponding remote control, the movement of both can be tracked in real-time.



A top-down 2D perspective is the most commonly used visualization technique in drone detection. The program is easy to understand and navigate due to its similarity to common satellite-image-based map solutions.


The 3D view expands our capabilities by adding the drone’s altitude information (this requires multiple drone detection systems), and making it easier to evaluate distances between different objects on the map.

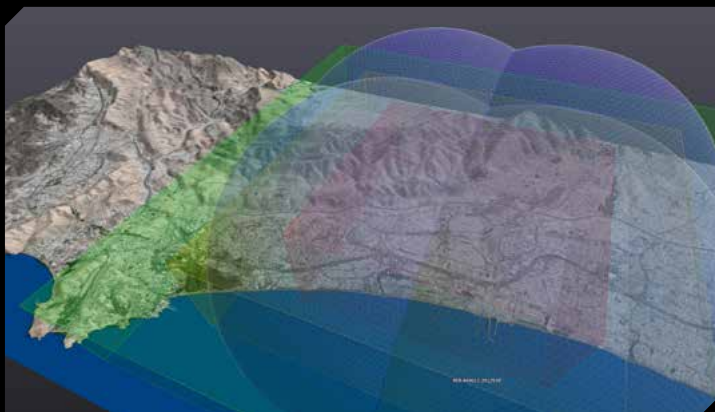

The topographic mode displays the surrounding terrain’s surface, depicting hills, mountains, peaks and valleys.

Combined with our 3D, man-made structures system building system, the topographic view creates the most accurate representation of the surrounding area: AARTOS™ is also able to integrate 3D models of complex areas (e.g. cities, airports, etc.) into its 3D view, improving usability for end users.

Versatile, powerful and easy to use – the RTSA Suite PRO block graph editor lets you create, manage and customize your DDS missions.

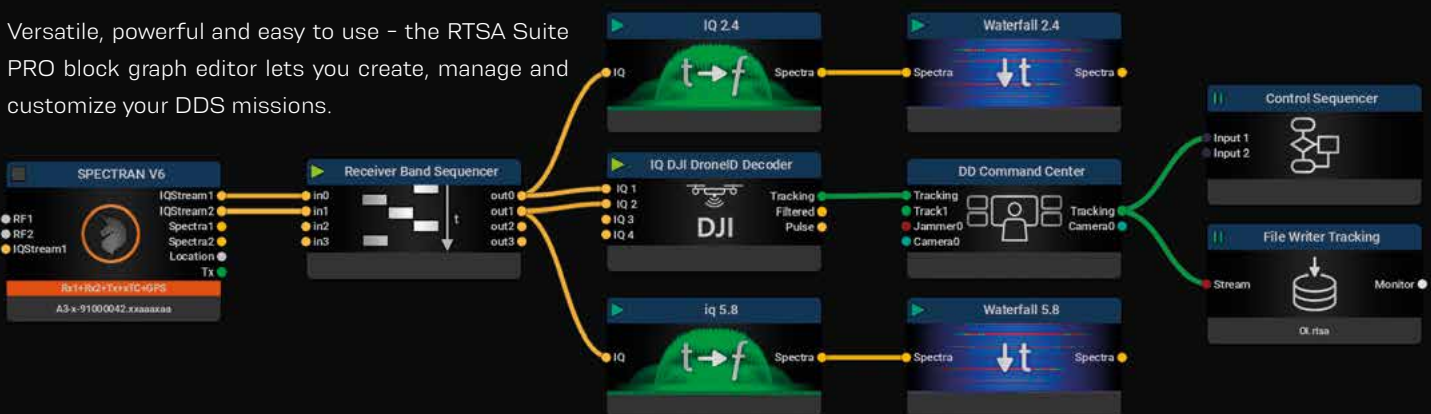



While all X2 standard versions come with two omnidirectional antennas capable of a detection range up to 5 km we also offer portable and stationary long range antennas, which extend the detection range dramatically to up to 40 km (FCC) in adequate line-of-sight conditions.

With the use of high-gain directional antennas mounted either on a portable and

extendable tripod or on a mast or tower the operator is able to reliably detect drones and drone swarms and their operator(s) at exceptionally high distances.

AARTOS™ Radar can determine and display the exact position, flight direction, altitude and of an inbound drone in real-time.

By extending the AARTOS™ X2 to include our stationary jammers with a jamming

range of up to 10 km, it creates a system that can reliably and quickly locate and neutralize threats.

Our AARTOS™ Cam is a fully integrated, optical, and thermal solution for the optical verification of drones. It enables the user to visually spot detected drones, even from large distances, and identify potentially dangerous payloads.

AARTOS™ X2 Specifications

Antenna Specifications

Typical range ▶	Standard: max. 5 km Long range: max. 40 km	Antenna variant ▶	Standard Omni Antennas		Long Range Antennas	
	Usage ▶	Mobile & stationary	Frequency ▶	2.4 - 2.5 GHz	5.1 - 5.9 GHz	2.4 - 2.5 GHz
Frequency coverage ▶	2.4 GHz + 5.8 GHz	Quantity included ▶	1	1	3	3
Detection type ▶	Drone protocol decoding	Gain ▶	6 ± 0.5 dBi	8 ± 0.5 dBi	20 dBi	14 dBi
Decoding ▶	DJI OcuSync 1-3, DJI WIFI, Mavlink protocols	VSWR (Max.) ▶	1.5:1	1.5:1	<1.3:1 avg.	<1.5:1 avg
Tracking type ▶	GPS	Horizontal Beam Width ▶	360°	360°	120°	120°
Tracking accuracy ▶	Typically 2 - 3 meters	Polarisation ▶	Linear, vertical	Linear, vertical	Vertical	Vertical
Scalable ▶	Yes (stationary X2)	Impedance ▶	50 Ohm	50 Ohm	50 Ohm	50 Ohm
Optional radar and camera ▶	Yes (stationary X2)	Radiation pattern ▶	Omnidirectional	Omnidirectional	Directional	Directional
Optional jamming systems ▶	Yes (stationary X2)	Connector ▶	N(f)	N(f)	N(f)	N(f)
		Temperature range ▶	-40 to +80° C	-40 to +80° C	-20°C - +60°C	-20°C - +60°C
		Humidity ▶	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing
		IP rating ▶	IP65	IP65	IP65	IP65
		Dimensions ▶	ø 25x660 mm	ø 25x660 mm	990x230x65 mm	455x115x60 mm
		Weight approx. ▶		0.5 kg	30 kg (6 antennas with amps & tripod mount)	



Analyzer Specifications

AARTOS™ X2 PC Specifications

		Device type ▶ X2 Portable	X2 Portable MIL-Grade	X2 Stationary
Analyzer units ▶	1			
Frequency range ▶	10 MHz to 6 GHz	CPU ▶ Intel i7-1360P	Intel® Xeon® E-2176M	Intel i7-1360P
Real-time bandwidth ▶	120 MHz	RAM ▶ 64 GB	64 GB	64 GB
POI ▶	97 ns (FFT-based), 10 ns (direct I/Q-based)	Data storage ▶ 1 TB	4 TB	1 TB
DANL (internal preamp on) ▶	Typ. -172dBm/Hz	Display ▶ 18,5" Full HD, 2000nits	15,6" Full HD	15,6" (on separate PC)
RF connectors ▶	2x Rx N	Graphics card ▶ Intel® Iris® Xe Graphics	Dedicated NVIDIA® GTX 1050 with 4 GB	Intel® Iris® Xe Graphics
Frequency reference accuracy ▶	0,5 ppm (5 ppb via OCXO option)	Connectors ▶ 1x RJ-45 (2.5-Gbit), 3x USB-A 3.2 (5 Gbit/s)	1x RJ-45 (GLAN), 2x USB 3.1 Gen. 2, Audio-In / Out, VGA, DP, 2x Serial DB9	RJ-45 (2.5-Gbit)
RBW (resolution bw) ▶	62 mHz to 57 MHz	Battery runtime ▶ Up to 120 min., up to 10h with optional battery pack	Up to 90 min., up to 15h with optional battery pack	No internal battery
Attenuator range ▶	50 dB / 70 dB (0,5 dB steps)	Weight ▶ Approx. 15 kg	9,5 kg	Approx. 25 kg
ADC ▶	2 x 2GSPS 16 Bit	Dimensions (L x W x H) ▶ 52 x 17 x 42 cm	39 x 30 x 9 cm	54 x 37 x 21cm
DAC ▶	1 x 2GSPS 14-Bit	Temperature (operation) ▶ -10°C to +45°C	-10°C to +50°C (optional -20 °C to +60 °C)	-20°C to +60°C
		Temperature (storage) ▶ -20° to +60°C	-20 to +60°C	-30°C to +70°C
		Relative humidity ▶ 95% relative humidity, non-condensing	95% relative humidity, non-condensing	95% relative humidity, non-condensing
		Power input ▶ AC input: 100-240V, 50-60Hz	AC input: 100-240V, 50-60Hz	AC input: 100-240V, 50-60Hz
		Power consumption ▶ Typ. <150W	Typ. <100W	Typ. <70W
		MIL & IP Standard ▶ IP54	MIL-STD810G, MIL-STD-461F, IP65	IP67



AARTOS™ X2 Versions

AARTOS™ X2
Portable



Art. no. 801/009

AARTOS™ X2
MIL-STD



Art. no. 801/014

AARTOS™ X2
Stationary




Art. no. 801/010

AARTOS™ X2 Long Range
Portable



Art. no. 801/011

AARTOS™ X2 Long Range
MIL-STD



Art. no. 801/012

AARTOS™ X2 Long Range
Stationary



Art. no. 801/013

AARTOS™ X2 Upgrades and Accessories

Medium-Range Camera



Art. no. 803/001

Ultra Long-Range Camera
with thermal optics



Art. no. 803/003

AARTOS UAV 4D Radar
Bundle with
four panels



Art. no. 804/005

Handheld Drone Jammer
battery powered



Art. no. 802/001

AARTOS X2 Powerbank



Art. no. 805/031

AARTOS DDS App
incl. Tablet PC



Art. no. 805/002

3D Topographic View
for RTSA Suite PRO



Art. no. 806/003

Training Course
for AARTOS X2,
Jammer, Radar
& Camera



Art. no. 807/002

Local Training Course
for AARTOS X2,
Jammer, Radar
& Camera



Art. no. 807/005



FJ SERIES

Fixed Bands Sector Jammers

By extending the AARTOS™ DDS to include our "FJ series" stationary jammer with a jamming range of up to 8 km, it creates a system that can reliably and quickly locate and neutralize threats.

With its directional and omnidirectional antennas and a maximum output power of 1300W the jammer is capable of countering drones within the most common frequency bands (430 MHz, 1.6 GHz, 2.4 GHz and 5.8 GHz).

As with all of our jammers, the interference created is extremely selective, in order to make sure other RF channels are not impaired. In addition, the jammer is directional, and will only jam signals in the direction of the incoming UAV.



SJ SERIES

Programmable Smart Sector Jammer

Our AARTOS™ DDS "SJ series" programmable jammer delivers a gapless coverage from 400 MHz to 6 GHz with an effective jamming range of 10 km.

With its directional antennas it is able to cover all commercial and military drones up to 6 GHz and can counter them with a freely adjustable output power of 30W per sector (upgradable to 100W).

The AARTOS™ CMS (Countermeasure Solutions) can only be sold to entities with proper government approval for the deployment of jammers.

For more information, contact us at mail@aaronia.de.

SJ²⁴⁰ SJ⁸⁰⁰

Seamless frequency jamming from 400 MHz to 6 GHz with a 360° coverage and the highest range in our lineup.

FJ³⁶⁰

The stationary FJ series cover 360° with a range of up to 3 km and up to 15 frequency bands.

MJ¹⁷⁰

The mobile 6-band jammer is based on the MJ-40 with extended range and output power including a remote control and customizable bands.

MJ⁴⁰

This handheld UAV jammer is a potent and portable drone jamming system with 2h battery life and customizable frequency bands.

Typ. Range	▶ 4 km / 10 km	3 km	3-4 km	2 km
Antenna(s)	▶ 8 directional	2/4 directional	1 directional	1 directional
Sectors	▶ 8	2/4	1	1
Bands	▶ All bands up to 6 GHz	Up to 15	6	4
Output Power	▶ 240W / 800W	180W / 360W	170W	40W



XCAM SERIES


Optical & thermal PTZ Cameras

Among the latest additions is the Visual Detection System, a fully integrated optical and thermal drone detection solution that is perfectly matched to the detection mechanisms of the AARTOS™ DDS.

This option enables the user to spot detected drones, even from afar, and identify potentially dangerous payloads attached to the drone, such as explosives.

Automated AI tracking will continue even if a drone enters autonomous flying mode while it is being tracked by the Visual Detection System.

- Thermal and optical camera for 24/7 protection
- Sophisticated tracking and analysis AI
- Max. camera resolution of 1920 x 1080 px (full HD)
- Max. thermal module resolution of 1280 x 720 px
- Optical: 13 mm to 261.5 mm focal length
- Thermal: 72 mm to 900 mm focal length
- IP67-certified protection

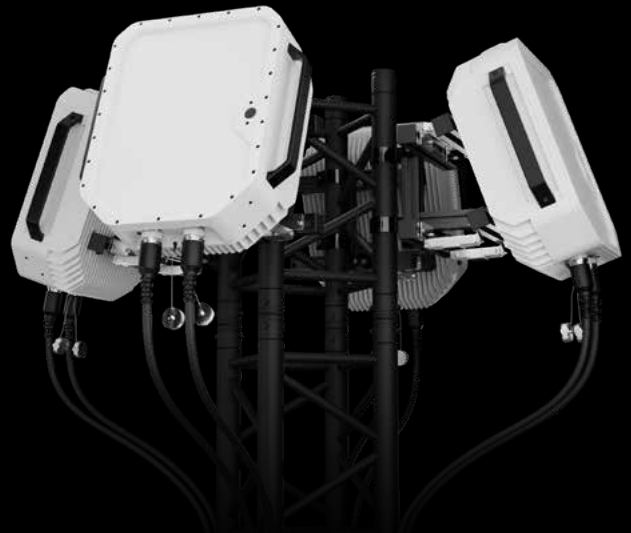

RD SERIES



Fully integrated modular radar capabilities

Using an (optional), sophisticated radar system, the AARTOS™ DDS can automatically determine and display the exact position, flight direction, altitude, speed and classification of an inbound drone. The trajectory of the flight can also be tracked in real-time as a 3D model.


The system distinguishes between birds, fixed-wing drones and propeller drones. When a UAV enters the designated no-fly zone, a multi-alarm can be configured.

Complete customization


The required equipment for AARTOS™ can be configured to match detailed customer requirements. End customers will receive hardware that is tailored to their specific needs, with all components chosen individually. This guarantees optimal drone detection performance in any given terrain or area.

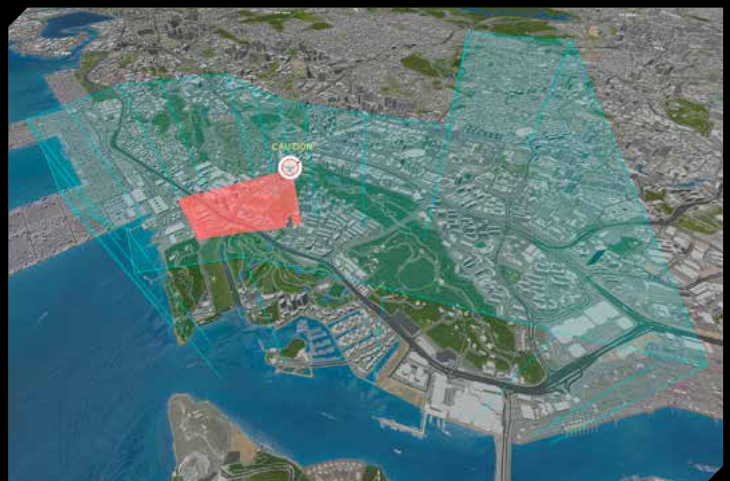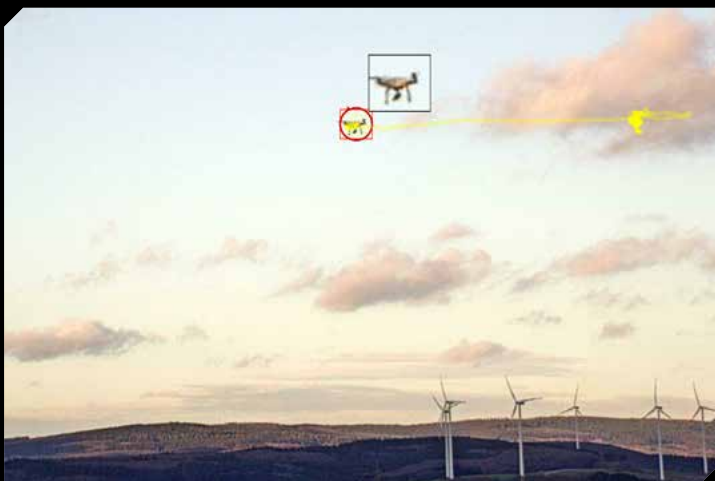


For detailed specifications of our products please visit www.aartos-dds.com or use the dedicated QR-Code:

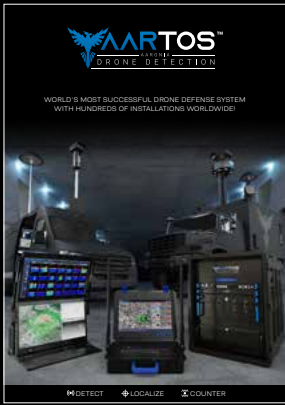


AARTOS™ Overview

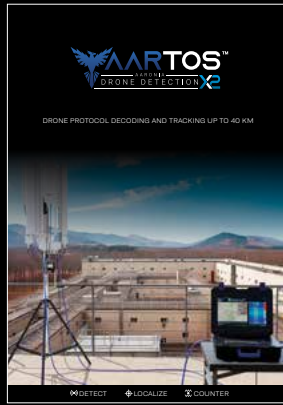

AARTOS™ X2

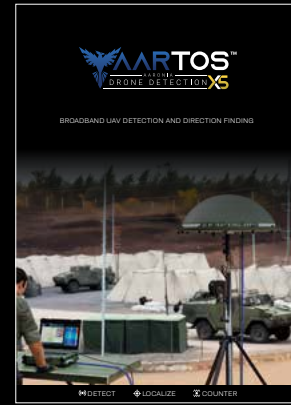

AARTOS™ X5

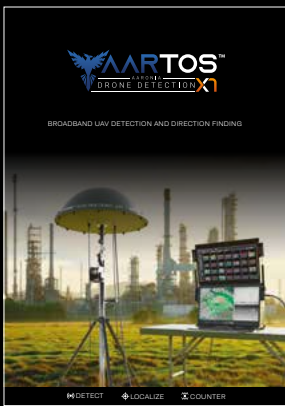

AARTOS™ X7



AARTOS™ X9



AARTOS™ Counter UAV Systems



AARTOS™ System Integrations



AARTOS™ Catalog

